




Microwave Air Coil Ordering Code

MG XX T XX-.020 H R S - 10

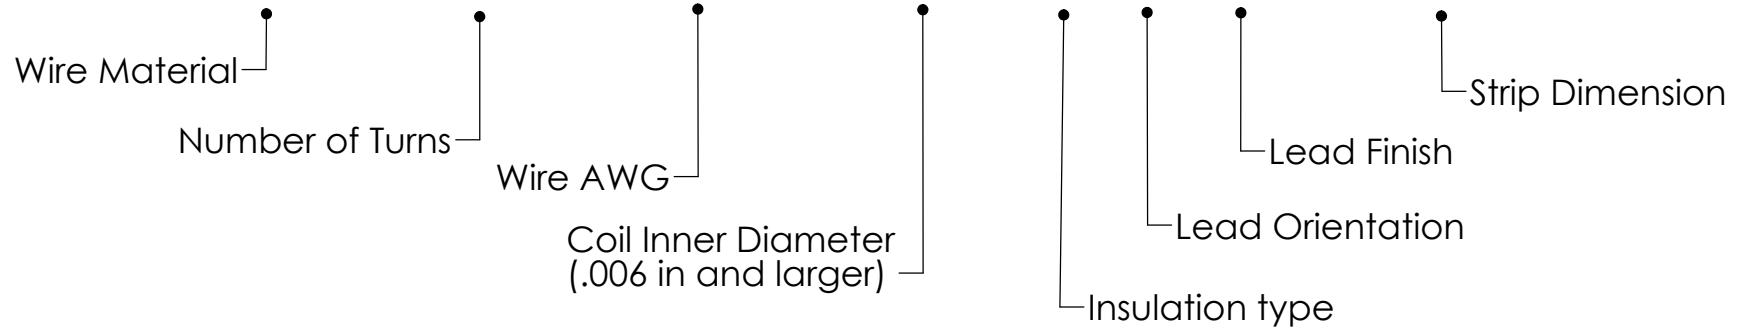

Wire Material

M = Copper Wire
 MG = Gold Wire
 MN = Nickel-Copper Alloy
 MK = 5-10 Micro-Inch Gold Plated Copper Wire

Insulation Type

H = High Temp (180 °C Or Higher Thermal Class)
 S = Standard 155 °C Thermal Class
 F = Solderable 105 °C Thermal Class

Lead Orientation

R = Radial
 O = Opposed
 A = Axial
 X = Special Axial

Lead Finish

N = None
 T = Tinned (.050 to .100 Of The Body Only)
 G = Gold plated to 100 uin*
 P = Tin Plate (.010 to .050)*
 S = Stripped

Stripping Dimension

50 = Stripped within .050 inches of the coil body
 25 = Stripped within .025 inches of the coil body
 10 = Stripped within .010 inches of the coil body*
 00 = Stripped To the Body (up to 1/4 turn in)*
 Leave Blank if unstripped

***Minimum Qty Required for this operation**